



NAT 10

Capacity

Kg

45	+90°C +3°C	↓
34	+90°C -18°C	↓

Trays

78	Trays pitch [mm]
10	GN 1/1 (H40 - 65)
20	GN 1/1 (H20)
10	EN 60/40

Functions

Shock Freezing	Blast chilling	Ice cream hardening	Fish sanitation	Pastry
Thawing	Pre-cooling	Hot gas defrosting	Bottle cooling	Cell sanitizing
Cell drying				

CONSTRUCTION FEATURES

7" touch screen controller
Unibody AISI 304 stainless steel
Rounded internal corners
CFC free highdensity polyurethane insulation
Evaporator with cataphoresis rust protection
Door hinge on left side
Heated door perimeter
External drip tray
Ozone sanitization
Multi-point heated core probe installed on the door
Door opening hook

ACCESSORIES

Pair of guides for trays
Remote C.U.
Additional core probe

CYCLES AND SOFTWARE

Probe cycles
Time cycles
Singleprobe cascade cycles
Multiprobe cascade cycles
Timer cycles
Quick start
Customizable parameters
Multiple and customizable cycle stages
Adjustable fan speed
Cycle data and graphs during operation
Cookbook
HACCP data collection
Customizable probe names

OPTIONALS

Right hinged door
Machine with wheels
Condenser filter
Ozone generator
4 probes predisposition
Wooden cage packaging
Wooden crate packaging


TECHNICAL DATA

	PlugIn Air	Remote	H2O PlugIn	CO2 provision
Temperature range [°C]	-40/+40			
Cooling capacity (evap. -10°C / cond. 45°C) [W]	4138	-	4138	-
Required cooling capacity [W]	-	4137	-	4137
ø liquid line ["] [mm]	-	3/8" [10]	-	3/8" [10]
ø suction line ["] [mm]	-	1/2" [12]	-	1/2" [12]
Condensation	Air cooled	Remote	Water cooled	Remote
Refrigerant gas	R290	R404A/R452A	R290	CO2
GWP	3	3922	3	1
Climatic class	5	5	5	5
Power supply [V/ph/Hz]	380-420/3N/50	220-240/1N/50	380-420/3N/50	220-240/1N/50
Max absorption cold cycles [W/A]	2701/7,04	385/2,04	2451/7,04	385/2,04
Max absorption hot cycles [W/A]	1240/4,3	1240/4,3	1240/4,3	1240/4,3
Blast chilling capacity (+90°C/+3°C) [kg]	45	-	45	-
Freezing capacity (+90°C/-18°C) [kg]	34	-	34	-
Inside dimensions WxDxH [mm]	650x433x810	650x433x810	650x433x810	650x433x810
External dimensions WxDxH [mm]	750x864x1620	750x864x1620	750x864x1620	750x864x1620
Internal capacity [L]	228	228	228	228
Packaging dimensions WxDxH [mm]	790x905x1770	790x905x1770	790x905x1770	790x905x1770
Packing volume [m3]	1,3	1,3	1,3	1,3
Gross weight [kg]	203	167	203	167
Net weight [kg]	188	152	188	152
Gas charge [g]	300	-	210	-


EN22042

65°C / +10°C	kWh/Kg	0,063	65°C / -18°C	kWh/Kg	0,19
	min	73		min	249
	Kg	50		Kg	50

GASTRONOMY

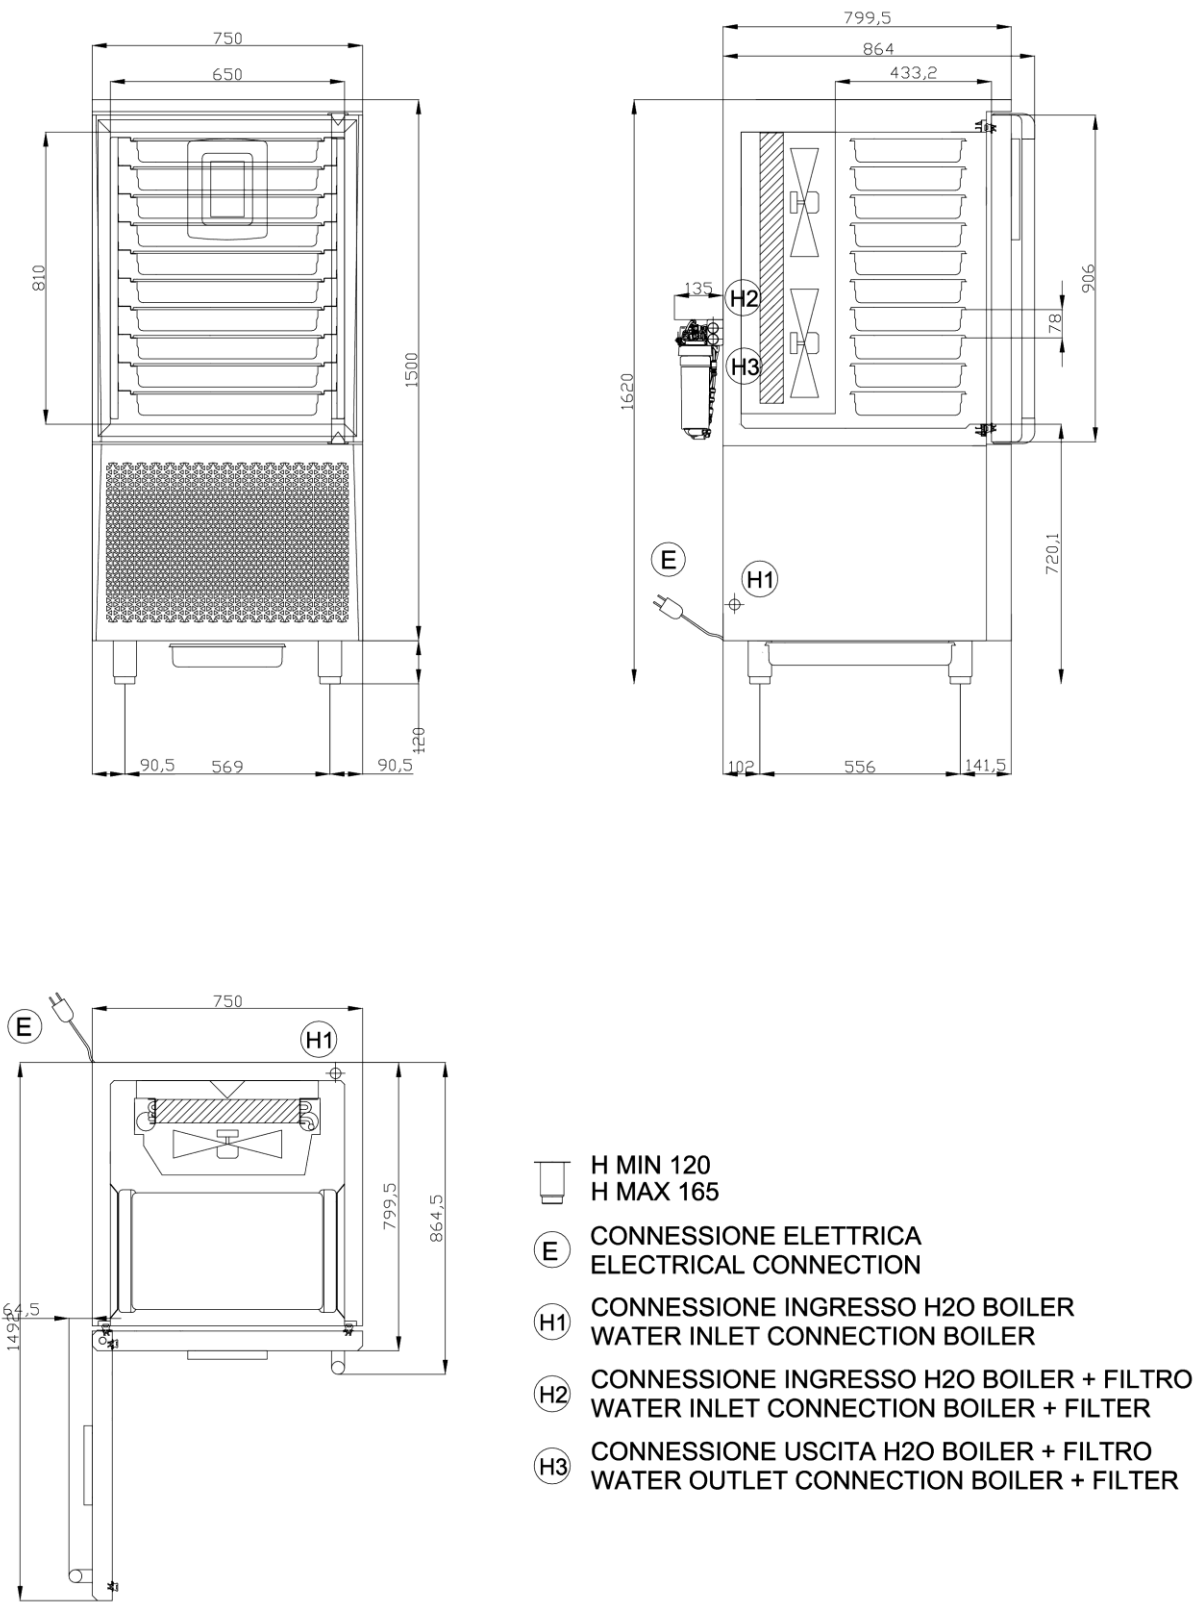

PASTRY

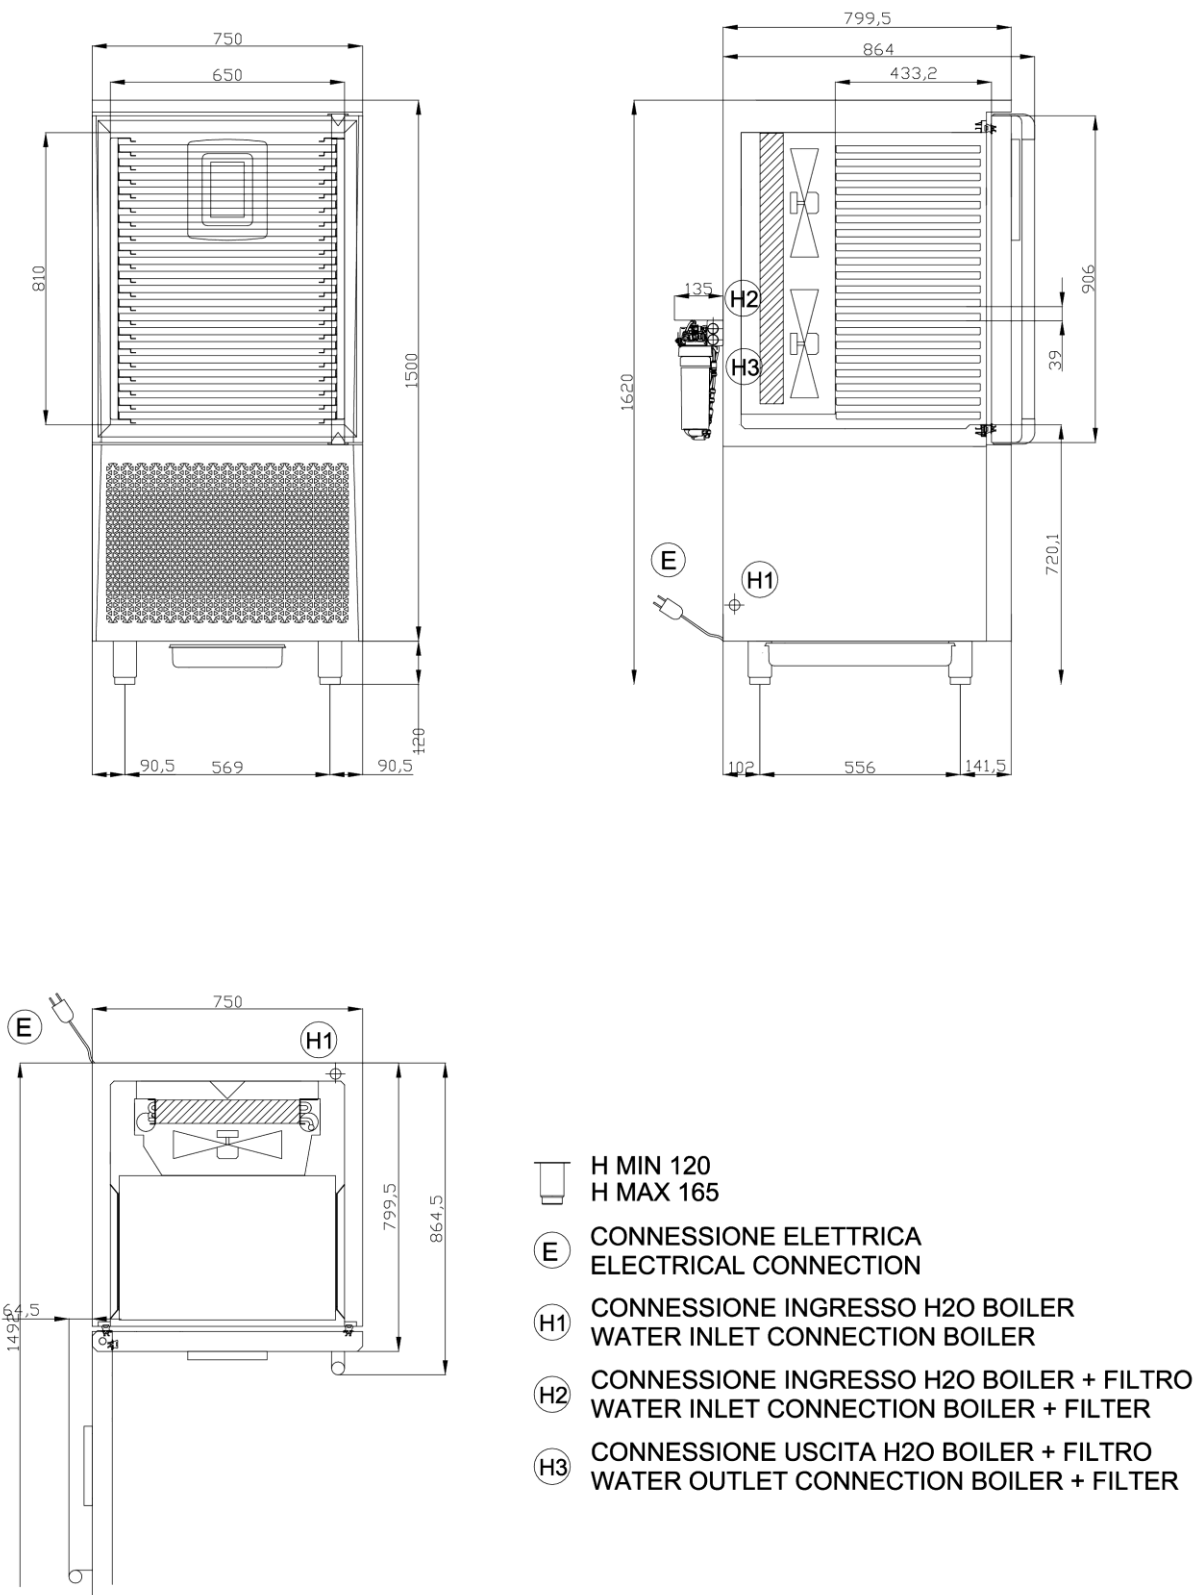

ICE-CREAM

