



NAT 15

Capacity

Kg

68	+90°C +3°C	↓
52	+90°C -18°C	↓

Trays

78	Trays pitch [mm]
15	GN 1/1 (H40 - 65)
30	GN 1/1 (H20)
15	EN 60/40

Functions

Shock Freezing	Blast chilling	Ice cream hardening	Fish sanitation	Pastry
Thawing	Pre-cooling	Hot gas defrosting	Bottle cooling	Cell sanitizing
Cell drying				

CONSTRUCTION FEATURES

7" touch screen controller
Unibody AISI 304 stainless steel
Rounded internal corners
CFC free highdensity polyurethane insulation
Evaporator with cataphoresis rust protection
Door hinge on left side
Heated door perimeter
External drip tray
Ozone sanitization
Multi-point heated core probe installed on the door
Door opening hook

ACCESSORIES

Pair of guides for trays
Remote C.U.
Additional core probe

CYCLES AND SOFTWARE

Probe cycles
Time cycles
Singleprobe cascade cycles
Multiprobe cascade cycles
Timer cycles
Quick start
Customizable parameters
Multiple and customizable cycle stages
Adjustable fan speed
Cycle data and graphs during operation
Cookbook
HACCP data collection
Customizable probe names

OPTIONALS

Right hinged door
Machine with wheels
Condenser filter
Ozone generator
4 probes predisposition
Wooden cage packaging
Wooden crate packaging


TECHNICAL DATA

	PlugIn Air	Remote	H2O PlugIn	CO2 provision
Temperature range [°C]	-40/+40			
Cooling capacity (evap. -10°C / cond. 45°C) [W]	4822	-	4822	-
Required cooling capacity [W]	-	4821	-	4821
ø liquid line [""] [mm]	-	3/8" [10]	-	3/8" [10]
ø suction line [""] [mm]	-	1/2" [12]	-	1/2" [12]
Condensation	Air cooled	Remote	Water cooled	Remote
Refrigerant gas	R290	R404A/R452A	R290	CO2
GWP	3	3922	3	1
Climatic class	5	5	5	5
Power supply [V/ph/Hz]	380-420/3N/50	220-240/1N/50	380-420/3N/50	220-240/1N/50
Max absorption cold cycles [W/A]	3394/7,96	548/2,96	3144/7,96	548/2,96
Max absorption hot cycles [W/A]	1410/4,3	1410/4,3	1410/4,3	1410/4,3
Blast chilling capacity (+90°C/+3°C) [kg]	68	-	68	-
Freezing capacity (+90°C/-18°C) [kg]	52	-	52	-
Inside dimensions WxDxH [mm]	650x433x1210	650x433x1210	650x433x1210	650x433x1210
External dimensions WxDxH [mm]	750x864x2020	750x864x2020	750x864x2020	750x864x2020
Internal capacity [L]	341	341	341	341
Packaging dimensions WxDxH [mm]	790x905x2170	790x905x2170	790x905x2170	790x905x2170
Packing volume [m3]	1,6	1,6	1,6	1,6
Gross weight [kg]	251	215	251	215
Net weight [kg]	236	200	236	200
Gas charge [g]	300	-	210	-


EN22042

65°C / +10°C	kWh/Kg	0,065	65°C / -18°C	kWh/Kg	0,253
	min	88		min	270
	Kg	75		Kg	60

GASTRONOMY

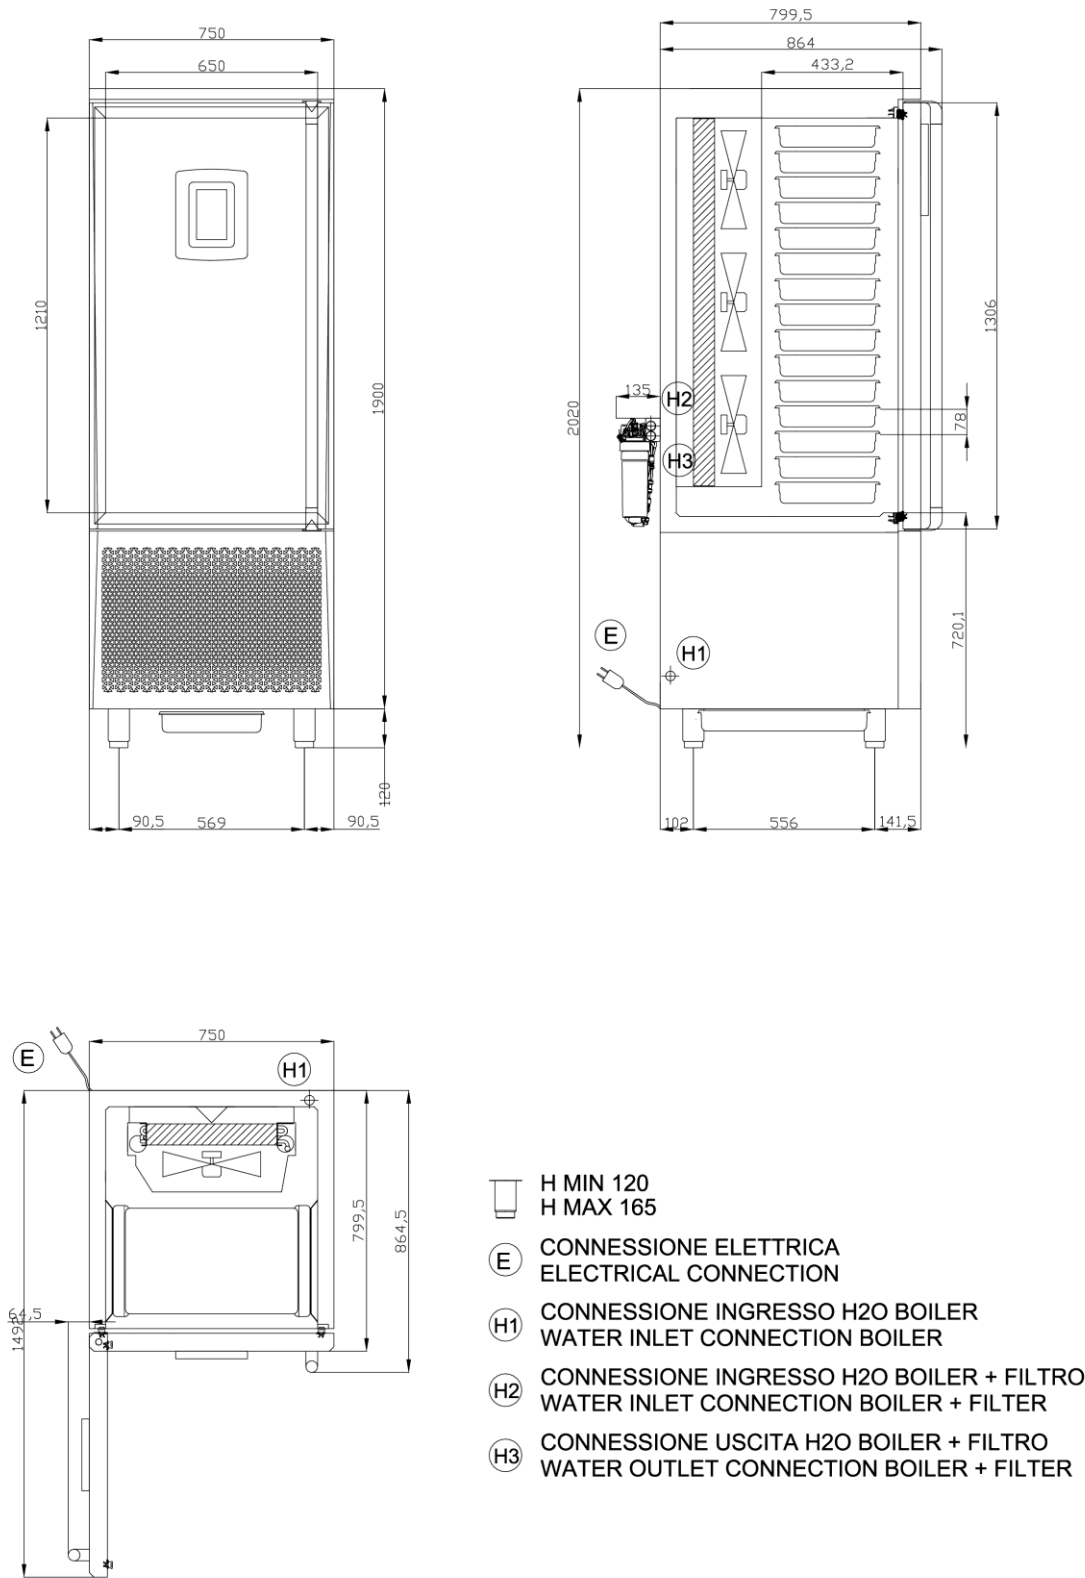

PASTRY

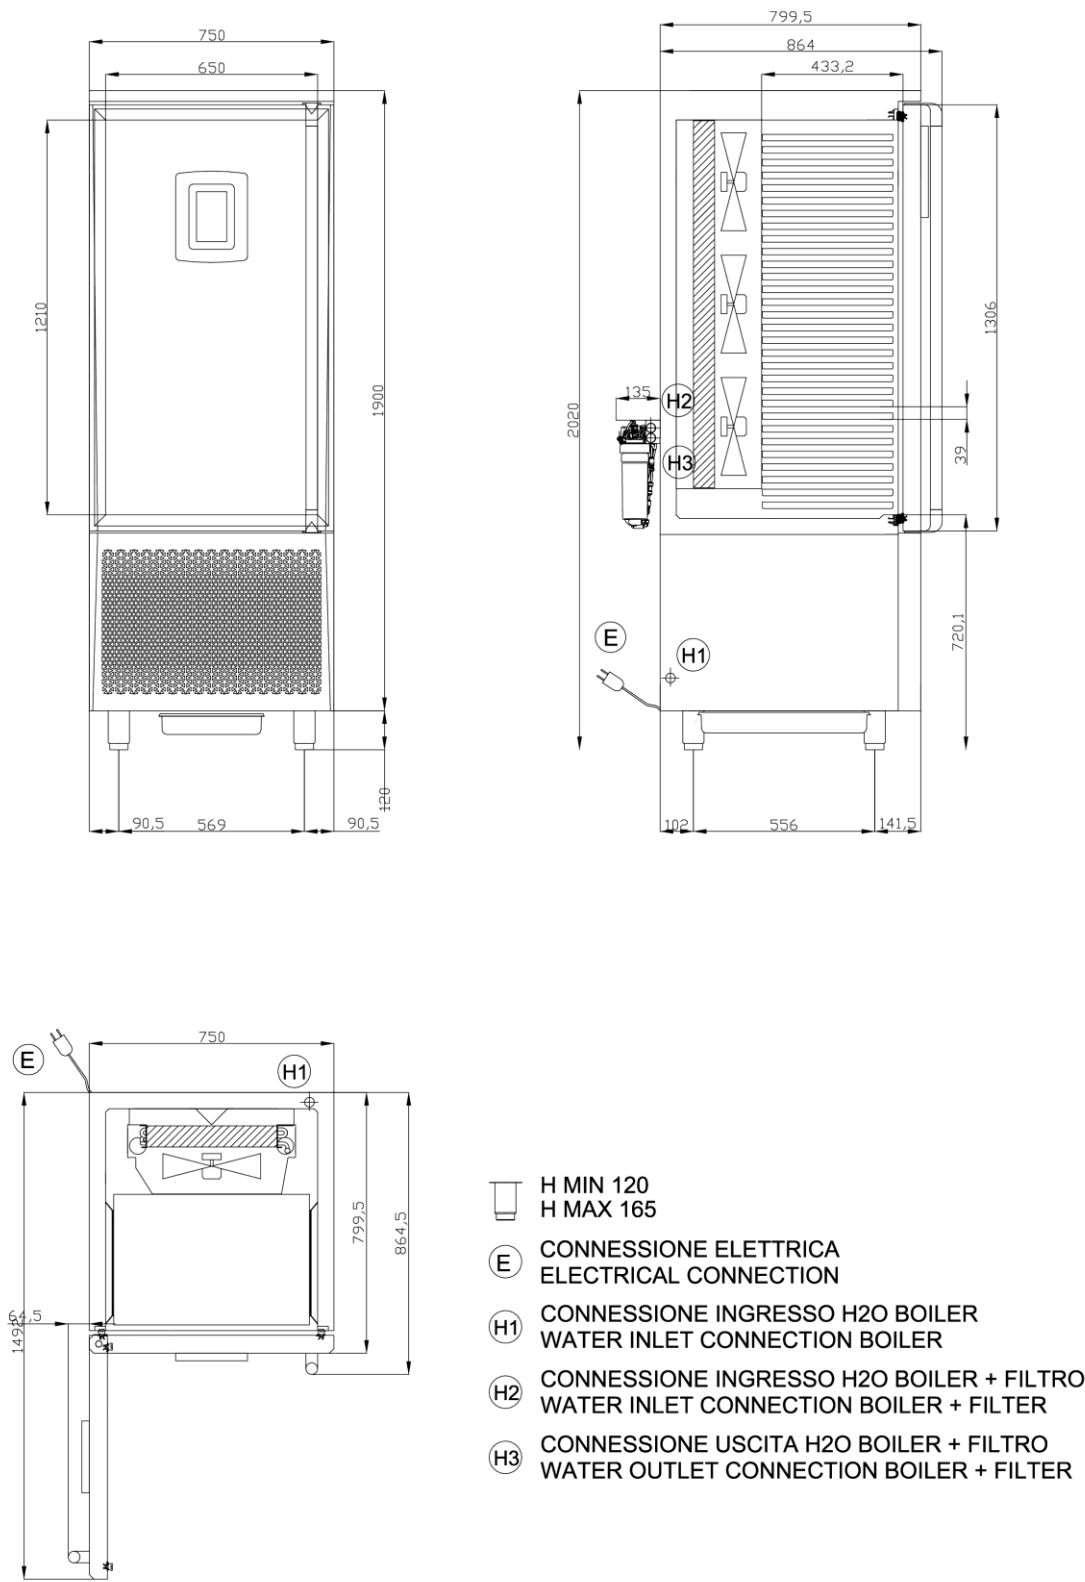

ICE-CREAM

