

ENTRY 3



Capacity

Kg

12	+90°C +3°C	↓
8	+90°C -18°C	↓

Trays

73	Trays pitch [mm]
3	GN 1/1 (H40 - 65)
3	GN 1/1 (H20)
3	EN 60/40

Functions

Shock Freezing

Blast chilling

Fish sanitation

Ice cream hardening

Pastry

Pre-cooling

Air defrosting

CONSTRUCTION FEATURES

4.3" touch screen controller

Unibody AISI 304 stainless steel

Rounded internal corners

CFC free highdensity polyurethane insulation

Evaporator with cataphoresis rust protection

Door hinge on left side

Heated door perimeter

External drip tray

Single core probe

CYCLES AND SOFTWARE

Probe cycles

Time cycles

Cookbook

HACCP data collection.

ACCESSORIES

EN tray holder

Lock predisposition

OPTIONALS

Door opening hook

Wifi connection

Right hinged door

Machine with wheels

Wooden cage packaging

Wooden crate packaging


TECHNICAL DATA

	PlugIn Air	Remote	H2O PlugIn	CO2 provision
Temperature range [°C]	-40/+20			
Cooling power (evap. -10°C / cond. 45°C) [W]	1020	-	1020	-
Required cooling capacity [W]	-	-	-	-
ø liquid line ["] [mm]	-	-	-	-
ø suction line ["] [mm]	-	-	-	-
Condensation	Air cooled	-	Water cooled	-
Refrigerant gas	R290	-	R290	-
GWP	3	-	3	-
Climatic class	5	-	5	-
Power supply [V/ph/Hz]	220-240/1N/50	-	220-240/1N/50	-
Max absorption cold cycles [W/A]	706/3,49	-	682/3,24	-
Max absorption hot cycles [W/A]	-	-	-	-
Blast chilling capacity (+90°C/+3°C) [kg]	12	-	12	-
Freezing capacity (+90°C/-18°C) [kg]	8	-	8	-
Inside dimensions WxDxH [mm]	615x417x305	-	615x417x305	-
External dimensions WxDxH [mm]	715x695x882	-	715x695x882	-
Internal capacity [L]	78	-	78	-
Packaging dimensions WxDxH [mm]	730x755x1100	-	730x755x1100	-
Packing volume [m3]	0,6	-	0,6	-
Gross weight [kg]	90	-	90	-
Net weight [kg]	77	-	77	-
Gas charge [g]	105	-	74	-




EN22042

65°C / +10°C	kWh/Kg	0,075	65°C / -18°C	kWh/Kg	0,301
	min	90		min	268
	Kg	15		Kg	10

GASTRONOMY

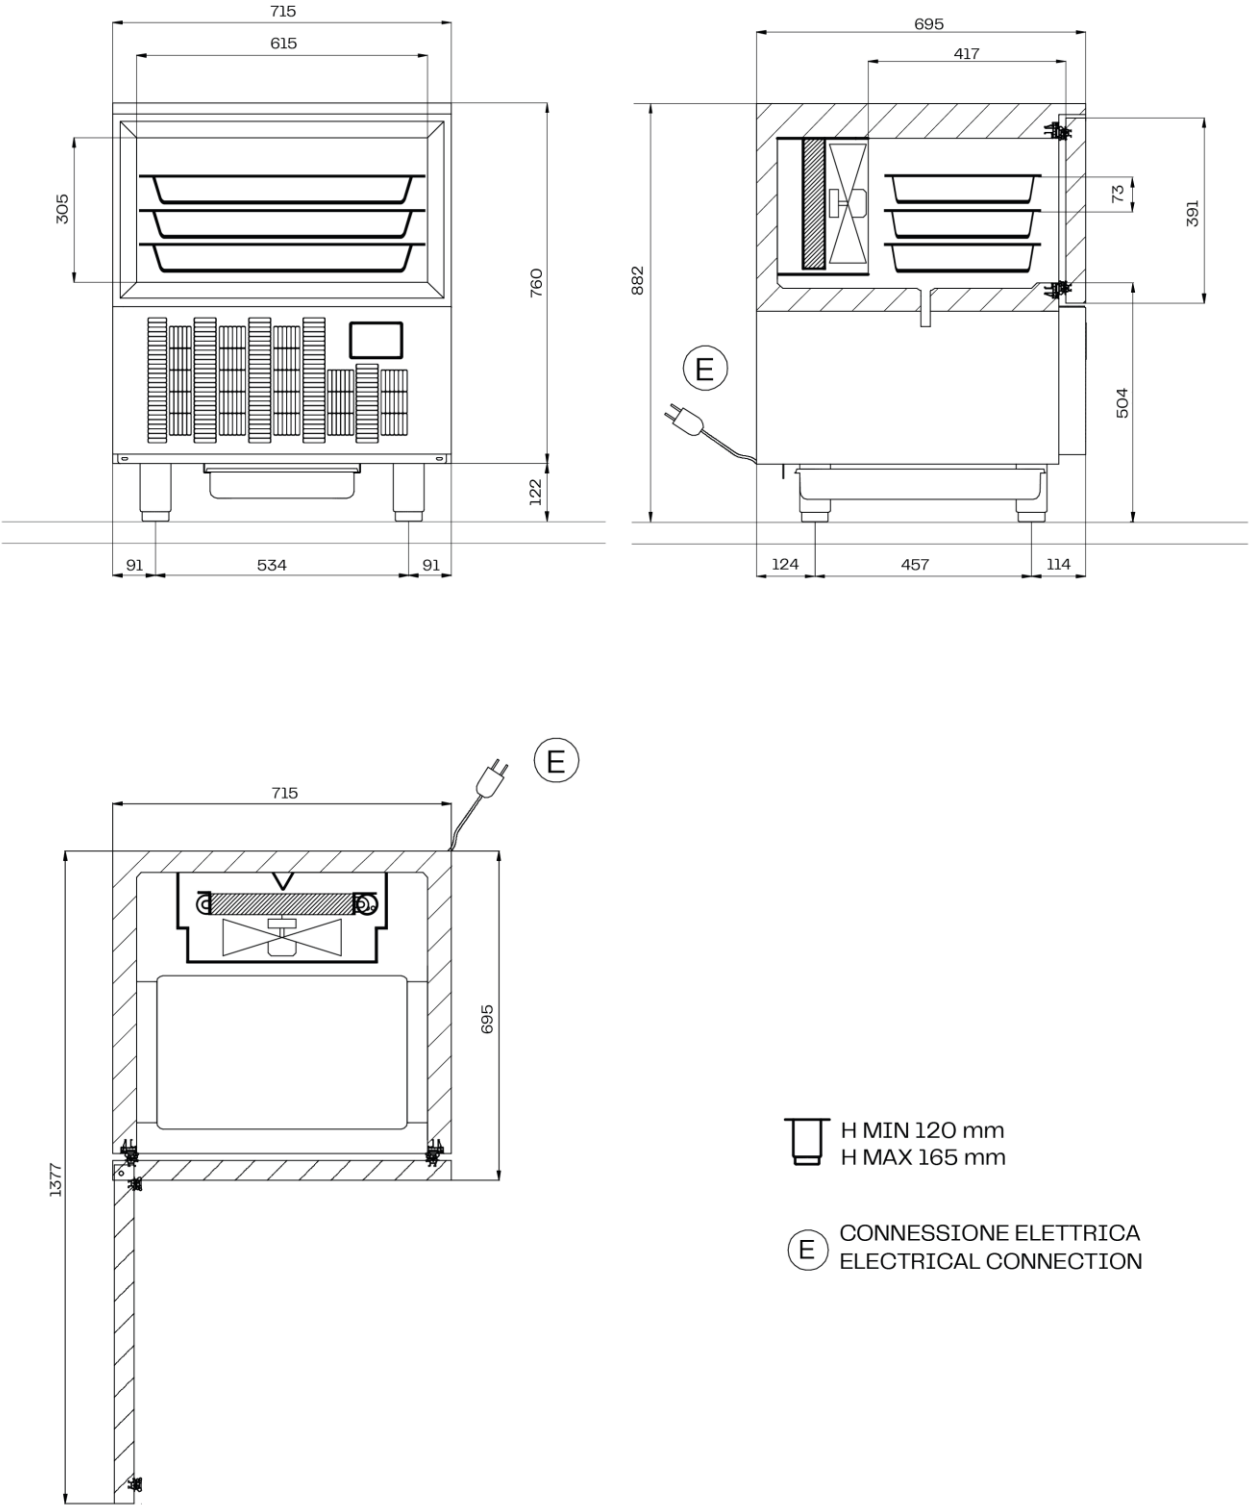





PASTRY

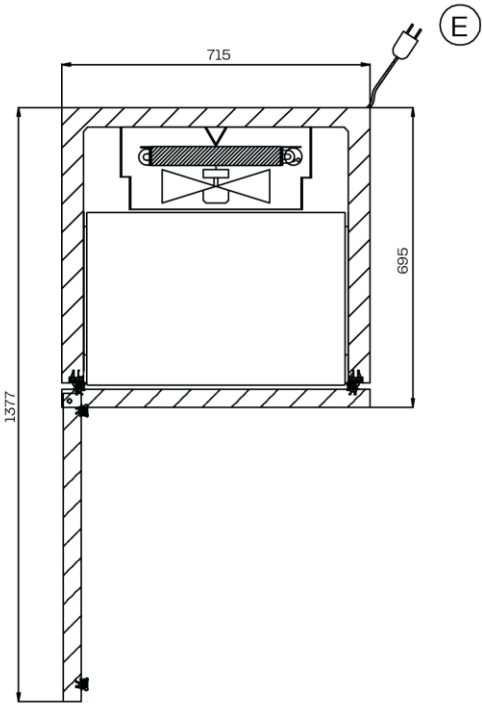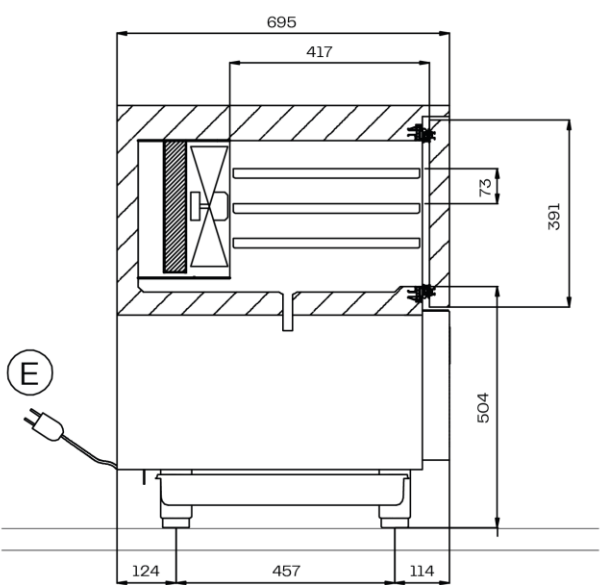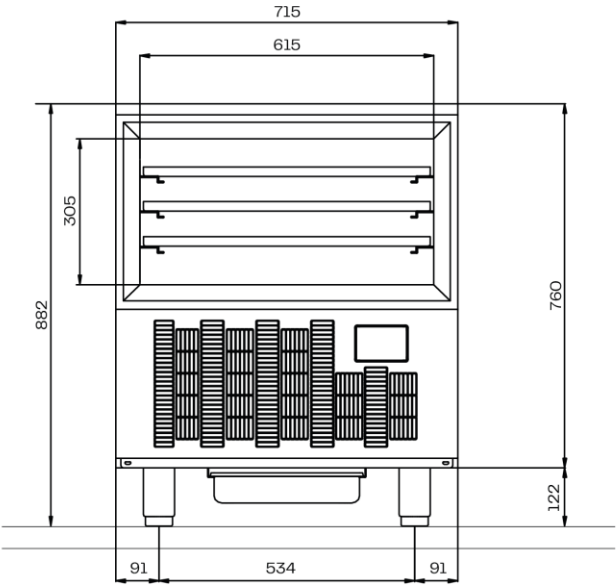

H MIN 120 mm
H MAX 165 mm

CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

ICE-CREAM

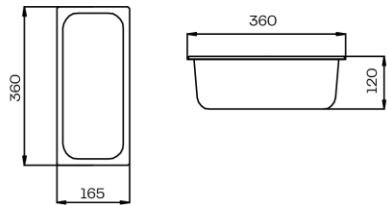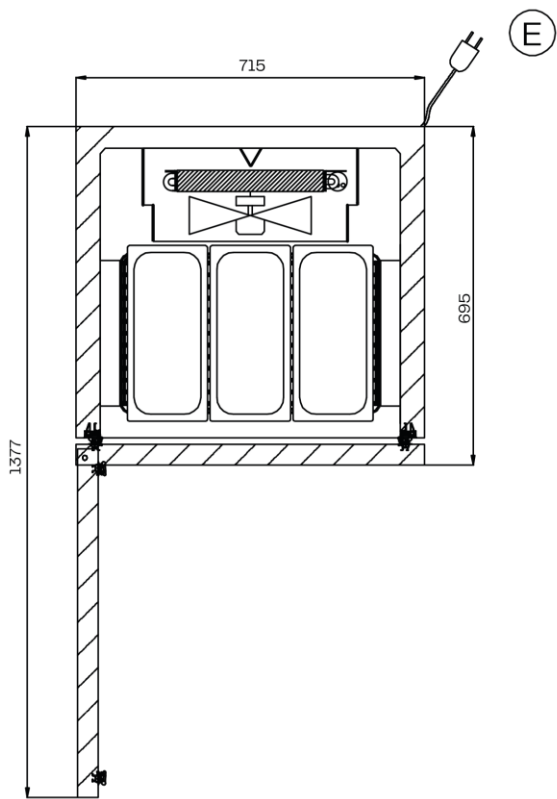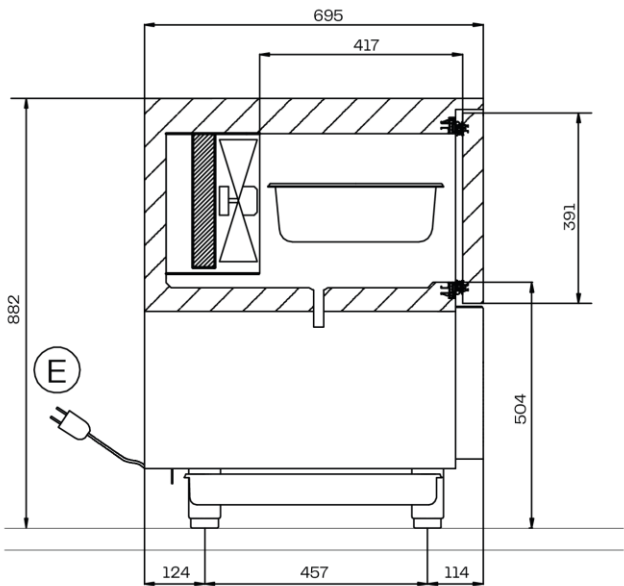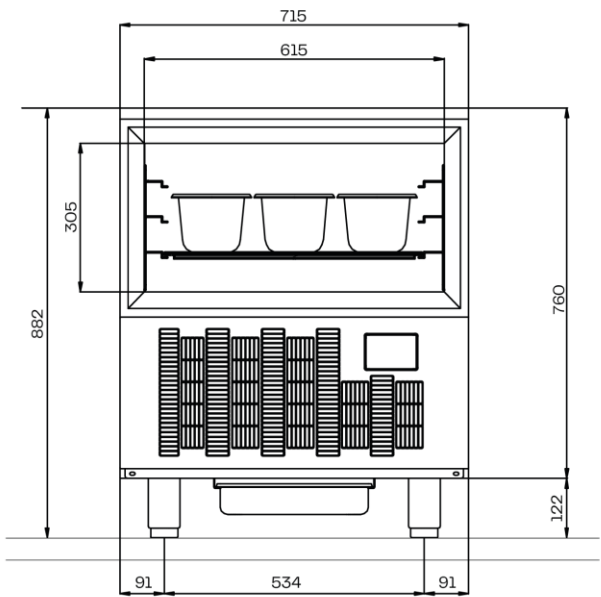

H MIN 120 mm
H MAX 165 mm

Ⓔ CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION